


# Siloxylated Polyethers – EO or PO

Siloxylated Polyethers – Ethoxylated or Propoxylated	Polymer Type	End Cap	% Siloxane	% EO	% PO	Molecular Weight	Visc., cSt	HLB-EO	CER
<i>Dow Corning</i> <sup>®</sup> 193C Fluid	Graft	OH	28	72	0	3,100	425	12.3	0.32
<i>Dow Corning</i> <sup>®</sup> Q2-5211 Superwetter	Graft	OH	32	68	0	600	40	11.5	0.43
<i>Dow Corning</i> <sup>®</sup> 5103 Surfactant	Graft	OH	35	65	0	2,500	260	10.5	0.57
<i>Dow Corning</i> <sup>®</sup> Q4-3667 Fluid	ABA	OH	45	55	0	2,200	350	9.2	0.56
<i>Dow Corning</i> <sup>®</sup> Q2-5097 Fluid	Graft	OH	47	53	0	2,300	400	7.9	0.92
<i>Dow Corning</i> <sup>®</sup> 2-8692 Fluid	ABA	OH	59	41	0	1,900	180	7.5	1.01
<i>Dow Corning</i> <sup>®</sup> 1248 Fluid	Graft	OH	87	0	13	6,100	170	0.0	5.69



Siloxylated Polyethers – Ethoxylated or Propoxylated	Aqueous Surface Tension, dynes/cm			Aqueous Cloud Point, 1% Weight Solution
	0.10%	0.01%	0.001%	
<i>Dow Corning</i> <sup>®</sup> 193C Fluid	28.9	31.7	38.0	83.0
<i>Dow Corning</i> <sup>®</sup> Q2-5211 Superwetter	21.0	23.4	36.5	< Room Temperature
<i>Dow Corning</i> <sup>®</sup> 5103 Surfactant	27.8	29.7	45.2	50.0
<i>Dow Corning</i> <sup>®</sup> Q4-3667 Fluid	32.5	37.6	56.4	< Room Temperature
<i>Dow Corning</i> <sup>®</sup> Q2-5097 Fluid	32.9	44.9	65.3	< Room Temperature
<i>Dow Corning</i> <sup>®</sup> 2-8692 Fluid	37.2	39.8	59.1	< Room Temperature
<i>Dow Corning</i> <sup>®</sup> 1248 Fluid	32.0	37.9	44.9	Insoluble

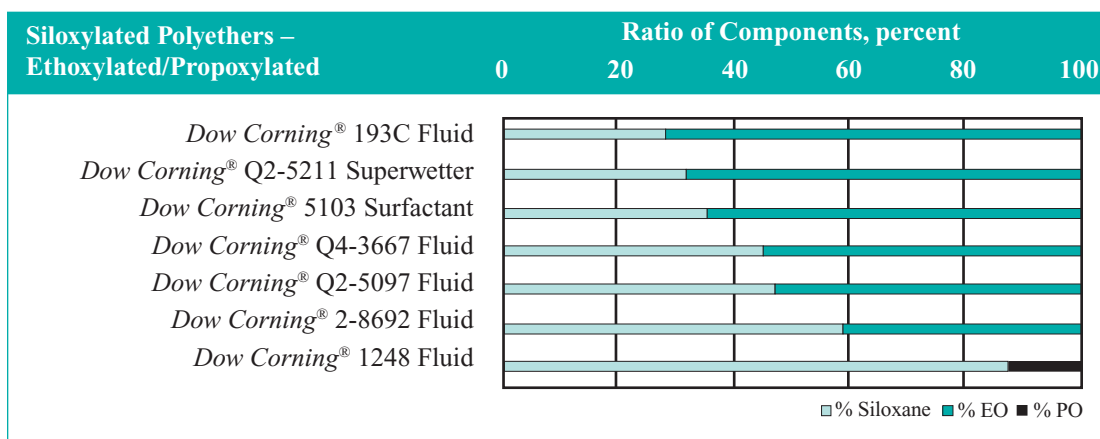

Chemical Manufacturing  
Solutions

**LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY**

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that Dow Corning's products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that the product will meet the Dow Corning sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

*Dow Corning* is a registered trademark of Dow Corning Corporation.

©2002-2007 Dow Corning Corporation. All rights reserved.

Printed in USA

AGP8891

Form No. 26-1150B-01